

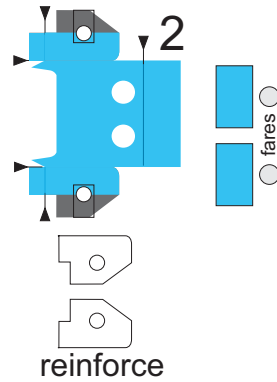



For free wheels use wired axles into the parts 4a(front) and 5a (rear)

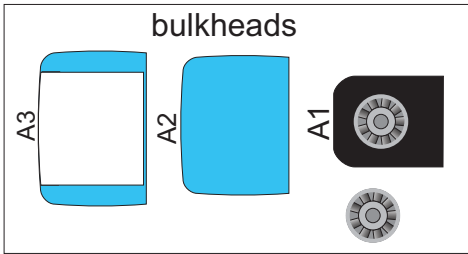






Malquevicz RonaldoM

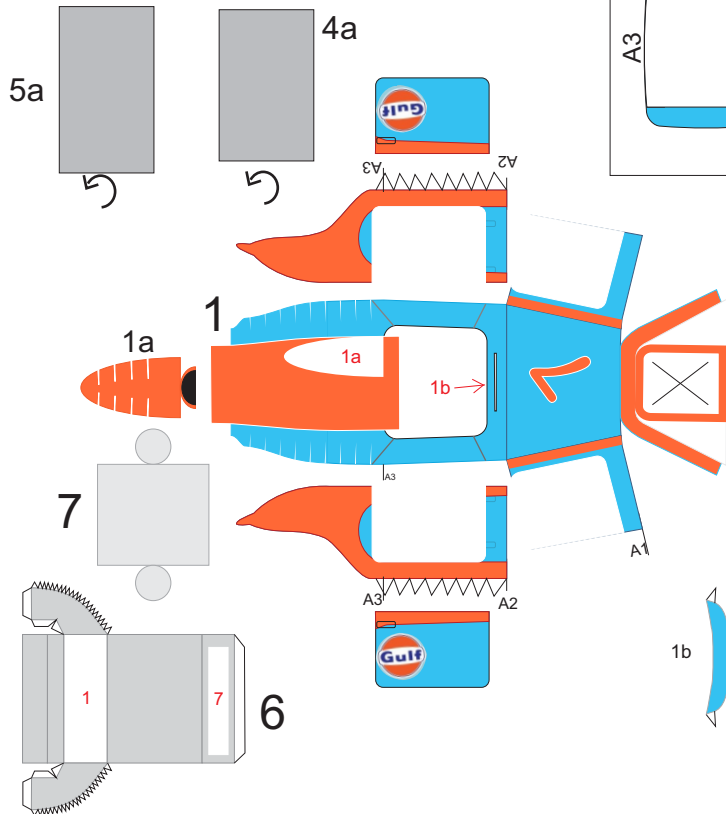

Optional: for fixed wheels use parts 5 glued on part 2 (front)


























Axle 4 (rear)

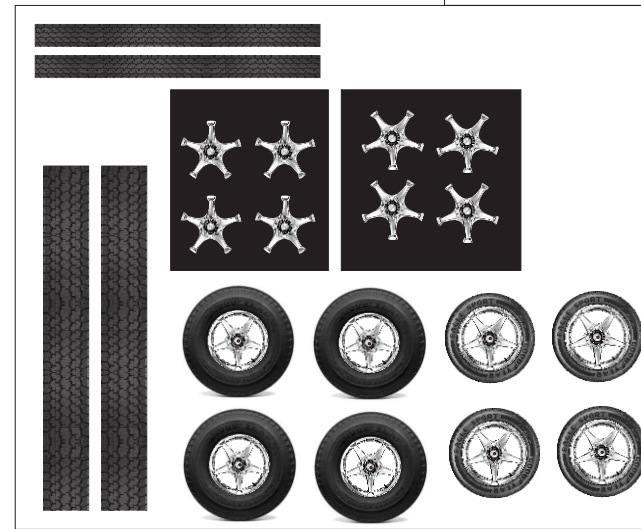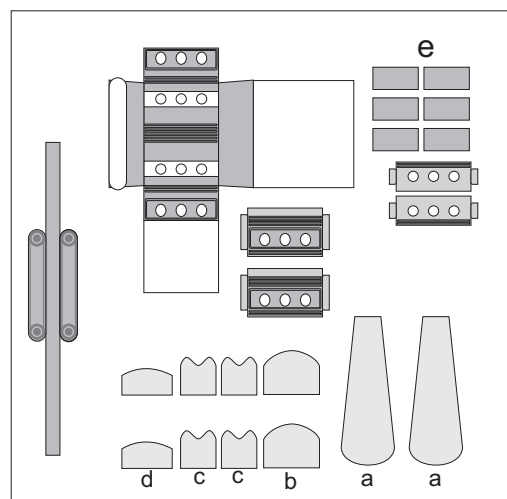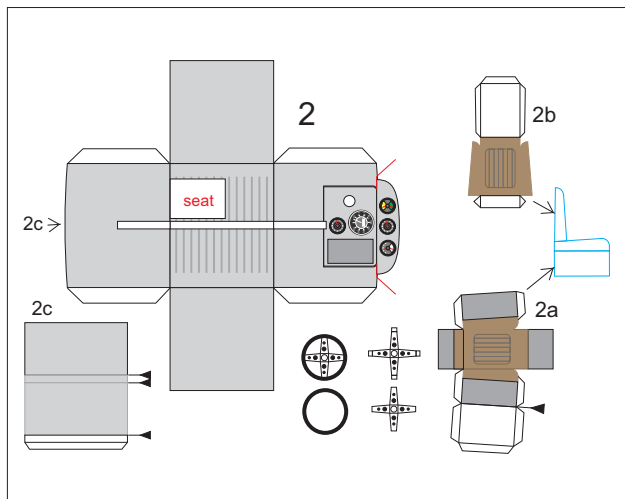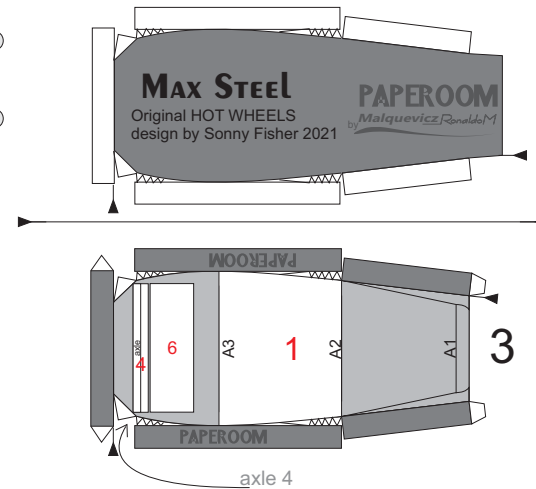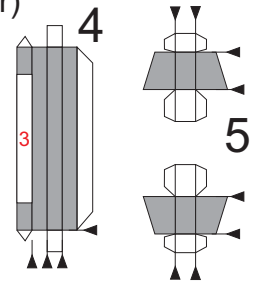

For fixed wheels



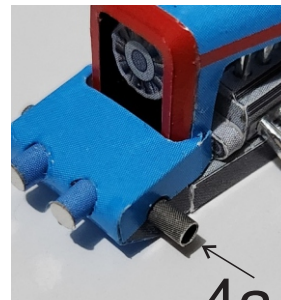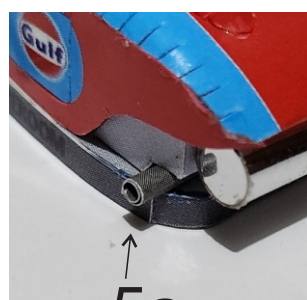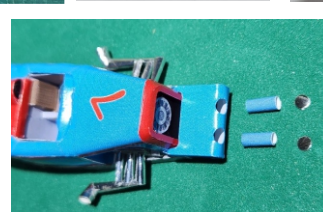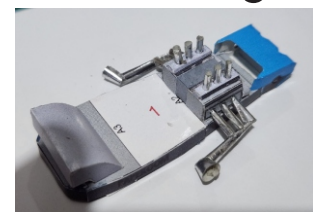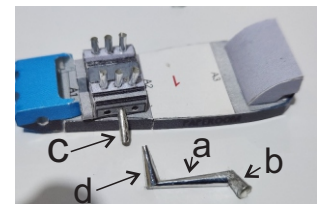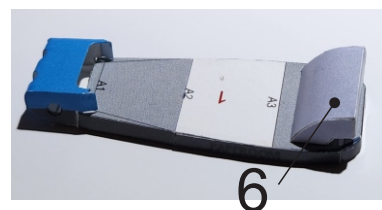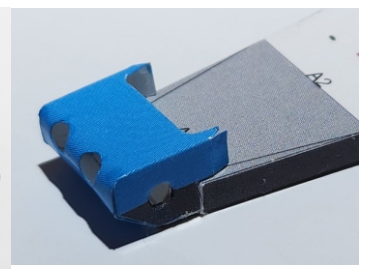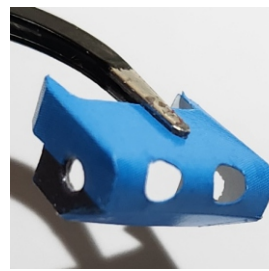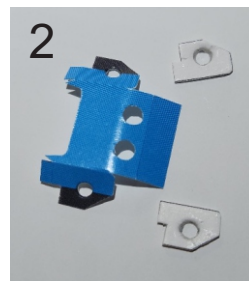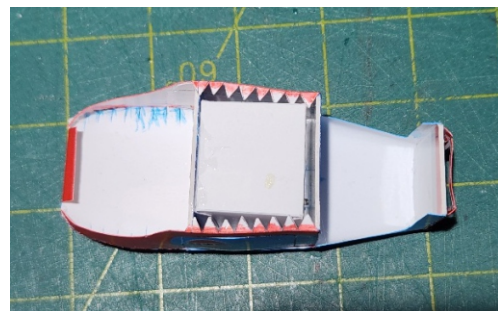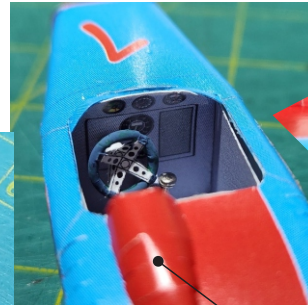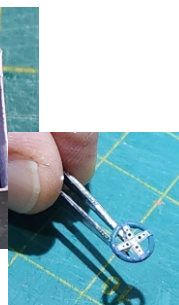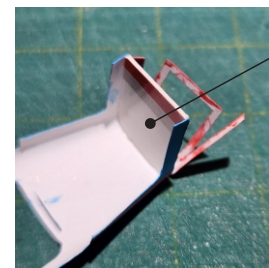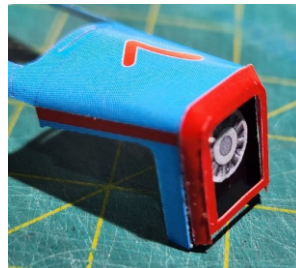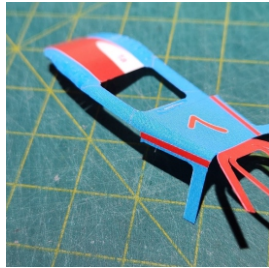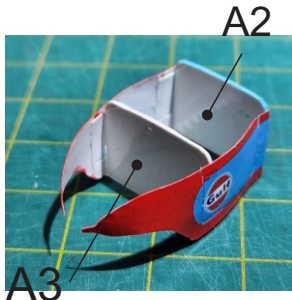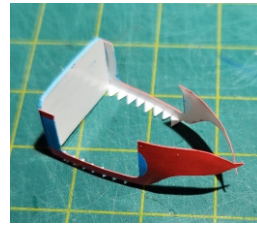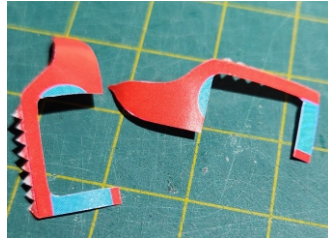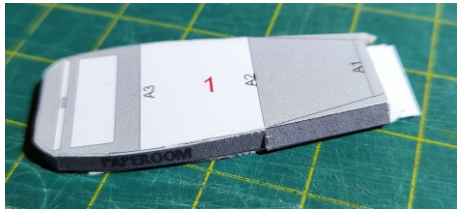

5a

4a